

5 BIOABSORBABLE BRANCHED POLYMERS CONTAINING
 UNITS DERIVED FROM DIOXANONE AND
MEDICAL/SURGICAL DEVICES MANUFACTURED THEREFROM

RELATED APPLICATIONS

10 This application is a continuation-in-part of
 copending application Serial No. 08/477,098 filed June 7,
 1995, which is a continuation-in-part of copending
 application Serial No. 08/278,898 filed July 22, 1994. The
 entire disclosure of these two applications are incorporated
 herein by reference.

15 BACKGROUND OF THE INVENTION

1. Technical Field

20 This disclosure relates generally to bioabsorbable
 polymer compositions. Specifically, this disclosure relates
 to highly branched or star polymers derived from monomers
 known to form absorbable polymers. The bioabsorbable
 polymer compositions are particularly useful in the
 manufacture of absorbable surgical devices such as sutures,
 staples clips, anastomosis rings, bone plates and screws,
 matrices for the sustained and/or controlled release of
 25 pharmaceutically active ingredients, etc., fabricated at
 least in part therefrom.

2. Background of Related Art

30 Polymers and copolymers of, and surgical devices
 made from, lactide and/or glycolide and/or related compounds
 are well-known. See, e.g., U.S. Patent Nos. 2,668,162,
 2,683,136, 2,703,316, 2,758,987, 3,225,766, 3,268,486,
 3,268,487, 3,297,033, 3,422,181, 3,442,871, 3,463,158,
 3,468,853, 3,531,561, 3,565,869, 3,597,449, 3,620,218,
 3,626,948, 3,636,956, 3,736,646, 3,739,773, 3,772,420,
 35 3,773,919, 3,781,349, 3,784,585, 3,792,010, 3,797,499,
 3,839,297, 3,846,382, 3,867,190, 3,875,937, 3,878,284,

3,896,802, 3,902,497, 3,937,223, 3,982,543, 4,033,938,
4,045,418, 4,057,537, 4,060,089, 4,137,921, 4,157,437,
4,243,775, 4,246,904, 4,273,920, 4,275,813, 4,279,249,
4,300,565, and 4,744,365, U.K. Pat. or Appln. Nos. 779,291,
5 1,332,505, 1,414,600, and 2,102,827, D.K. Gilding et al.,
"Biodegradable polymers for use in surgery-polyglycolic/poly
(lactic acid) homo- and copolymers: 1, "Polymer, Volume 20,
pages 1459-1464 (1979), and D.F. Williams (ed.),
Biocompatibility of Clinical Implant Materials, Volume II,
10 chapter 9: "Biodegradable Polymers" (1981). All of the
foregoing documents are hereby incorporated by reference.

In addition, other patents disclose surgical
devices prepared from copolymers of lactide or glycolide and
other monomers including caprolactone or trimethylene
15 carbonate have been prepared. For example, U.S. Patent No.
4,605,730 and U.S. Patent No. 4,700,704 disclose copolymers
of epsilon-caprolactone and glycolide useful in making
surgical articles and particularly surgical sutures having
low Young's modulus. In addition, U.S. Patent No. 4,624,256
20 relates to the utilization of high molecular weight
caprolactone polymers as coatings for surgical sutures,
while U.S. Patent No. 4,429,080 discloses surgical articles
manufactured from triblock copolymers prepared from
copolymerizing glycolide with trimethylene carbonate.

25 Polymers, copolymers and surgical devices made
from ϵ -caprolactone and/or related compounds have also been
described in U.S. Patent Nos. 3,169,945, 3,912,692,
3,942,532, 4,605,730, 4,624,256, 4,643,734, 4,700,704,
4,788,979, 4,791,929, 4,994,074, 5,076,807, 5,080,665,
30 5,085,629 and 5,100,433.

Polymers derived in whole or in part from
dioxanone are known. Homopolymers of p-dioxanone are
described, e.g., in U.S. Patent Nos. 3,063,967; 3,063,968;
3,391,126; 3,645,941; 4,052,988; 4,440,789; and, 4,591,630.

Copolymers containing units derived from p-dioxanone and one or more other monomers that are copolymerizable therewith are described, e.g., in U.S. Patent Nos. 4,243,775; 4,300,565; 4,559,945; 4,591,630; 4,643,191; 4,549,921; 4,653,497; 4,791,929; 4,838,267; 5,007,923; 5,047,048; 4,076,807; 5,080,665; and 5,100,433 and European Patent Application Nos. 501,844 and 460,428. Most of the known dioxanone-derived homopolymers and copolymers are indicated to be useful for the fabrication of medical and surgical devices such as those previously mentioned.


The properties of the bioabsorbable polymers may differ considerably depending on the nature and amounts of the comonomers, if any, employed and/or the polymerization procedures used in preparing the polymers. Aforementioned U.S. Patent No. 4,838,267 discloses block copolymers derived from p-dioxanone and glycolide that exhibit a high order of initial strength and compliance but lose their strength rapidly after implantation in the body. Sutures made from the copolymers are said to be particularly useful in surgical procedures, such as plastic surgery or repair of facial wounds, where it is desirable for the suture to lose its strength rapidly.

SUMMARY

The general formula of the novel polymers described herein is:

$$\text{CH}_2\text{OR}_1 - (\text{CHOR}_2) - (\text{CHOR}_3) - (\text{CHOR}_4) \dots (\text{CHOR}_n) - \text{CH}_2\text{OR}_{n+1}$$
wherein: n equals 1 to 13, preferably 2 to 8 and most preferably 2 to 6;

$R_1, R_2 \dots R_{n+1}$ are the same or different and selected from the group of a hydrogen atom or $(Z)_m$ wherein Z comprises repeating units selected from the group consisting of:




wherein p is 3 to 8 and each R' may be the same or different
 5 and are individually selected from the group consisting of
 hydrogen and alkyl having from 1 to 5 carbon atoms, such
 that at least three of said R₁, R₂...R_{n+1} groups are other
 than hydrogen;

m is sufficient such that the star polymer has an
 10 inherent viscosity in HFPI at 25°C between about 0.01 and
 about 0.5 dl/gm, preferably from about 0.15 to about 0.3
 dl/gm, and most preferably from about 0.15 to about 0.2
 dl/gm; and

the m's for each (Z) group may be the same or
 15 different.

The polymers are initiated with a polyhydric
 alcohol. Preferred initiators are mannitol, pentaerythritol
 and threitol.

In a particularly useful embodiment, a
 20 bioabsorbable polymer of the foregoing general formula is
 provided wherein (Z) consists essentially of repeating units
 of the formula:



and the polymer has an inherent viscosity between about 0.05
 and 0.5 dl/gram in HFIP at 25°C.

The polymers described herein are useful in the
 production of surgical devices. In particularly useful
 30 embodiments the polymers are used in coatings on surgical
 devices, such as, for example fibers used to produce
 sutures, meshes, woven structures, etc.


The polymers may be endcapped with an isocyanate.
 The isocyanate capped polymer may be cross-linked in the
 35 presence of water and/or a catalyst, such as tertiary amine

catalyst. The cross-linked star polymers are useful for example as bone adhesives or bone fillers. Optionally, the polymer may be mixed with a filler such as hydroxyapatite, tricalcium phosphate, bioglass or other bioceramic prior to cross-linking to produce a bone putty or a bone-growth-inducing substance to be packed into or used in conjunction with a bone fusion implant.

Alternatively, after endcapping with an isocyanate, a charge may be chemically induced on the polymer, such as, for example by reacting a fraction of the available isocyanate groups with diethylene ethanolamine (DEAE) and then cross-linking at least a portion of the balance of the remaining available isocyanate groups to form a water-insoluble, degradable, charged particle. These charged compositions are useful for example as an agent to enhance soft tissue wound healing.


DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The general formula of the basic polymer in accordance with this disclosure is:



wherein: n equals 1 to 13, preferably 2 to 8 and most preferably 2 to 6;

$R_1, R_2 \dots R_{n+1}$ are the same or different and selected from the group of a hydrogen atom or $(Z)_m$ wherein Z comprises repeating units selected from the group consisting of:



wherein p is 3 to 8 and each R' may be the same or different and are individually selected from the group consisting of hydrogen and alkyl having from 1 to 5 carbon atoms, such that at least three of said $R_1, R_2 \dots R_{n+1}$ groups are other than hydrogen;

m is sufficient such that the star polymer has an inherent viscosity in HFIP at 25°C between about 0.01 and about 0.5 dl/gm, preferably from about 0.15 to about 0.3 dl/gm; and most preferably from about 0.15 to about 0.2 dl/gm, and

the m's for each Z group may be the same or different.


The viscosity of the polymer, which is reflective of a number of factors including molecular weight, can be chosen to provide easier processing for different applications. Thus, for example, where the polymers are to be used for coatings or to form a bone wax, viscosities in the range of 0.15 to 0.2 dl/gm (coinciding to a molecular weight in the range of about 15,000 to about 25,000 are particularly useful. When using the polymers as a bone substitute, viscosities in the range of less than about 0.1 dl/gm (corresponding to a molecular weight of 500 to 2,000) are particularly useful.

The purified monomer(s) used to form the Z groups are preferably dried and then polymerized at temperatures ranging from about 20°C to about 130°C, preferably above 75°C, in the presence of an organometallic catalyst such as stannous octoate, stannous chloride, diethyl zinc or zirconium acetylacetonate. The polymerization time may range from 1 to 100 hours or longer depending on the other polymerization parameters but generally polymerization times of about 12 to about 48 hours are employed. In addition, a polyhydric alcohol initiator is employed to provide a highly branched or star structure. Any polyhydric alcohol may be employed, with mannitol ($C_6H_8(OH)_6$), pentaerythritol ($C(CH_2OH)_4$) threitol ($C_4H_8(OH)_4$) being preferred. Generally, the amount of initiator used will range from about 0.01 to about 30 percent by weight based on the weight of the monomer. The amount of initiator employed will depend on

the final properties desired in the polymer and the ultimate end use of the polymer. Thus, when preparing polymers for use as a coating, the initiator will be present in the reaction mixture in an amount from about 0.5 to about 5.0 weight percent based on the weight of the monomer. When preparing polymers for use as a bone substitute, the initiator will be present in an amount from about 15 to about 25 weight percent based on the weight of the monomer.

The polymeric chains (Z groups) may be formed using any monomer known to form a bioabsorbable polymer, however, preferably monomers of the type known as soft segments forming polymers constitute the predominant component (i.e., constitute more than 50 mole percent) of the polymeric chains. Thus, for example, the polymeric chains may be formed predominantly from ϵ -caprolactone; alkylene carbonates such as trimethylene carbonate; substituted alkylene carbonates such as dimethyl trimethylene carbonate (DMTMC); and/or p-dioxanone. When the polymers of this invention are used without isocyanate endcapping (as described more fully hereinafter), homo- or copolymers of DMTMC and homopolymer of p-dioxanone are preferred.

Particularly useful polymers are those wherein the Z groups consist essentially of repeating units derived from monomer having the formula:




The monomer can be prepared using known techniques such as, for example, those processes described in U.S. Patent Nos. 2,900,345; 3,119,840; 4,070,315 and 2,142,033,

the disclosures of which are incorporated by reference. A preferred method of preparing the monomer is by dehydrogenating diethylene glycol in the presence of a copper/chromium catalyst.

5 The monomer should be purified, preferably to at least about 98 percent purity. The monomer may be purified using any known technique such as multiple distillations and/or recrystallizations. A preferred purification process is recrystallization from ethyl acetate as described in U.S. 10 Patent No. 5,391,768 the disclosure of which is incorporated herein by reference.

Polydioxanone star polymers can be made by reacting p-dioxanone monomer with mannitol initiator in the presence of stannous octoate catalyst. The reaction is 15 allowed to continue until a polydioxanone chain is bound to three or more hydroxy groups per molecule of mannitol. The resulting polydioxanone star polymer can be represented by the following formula:

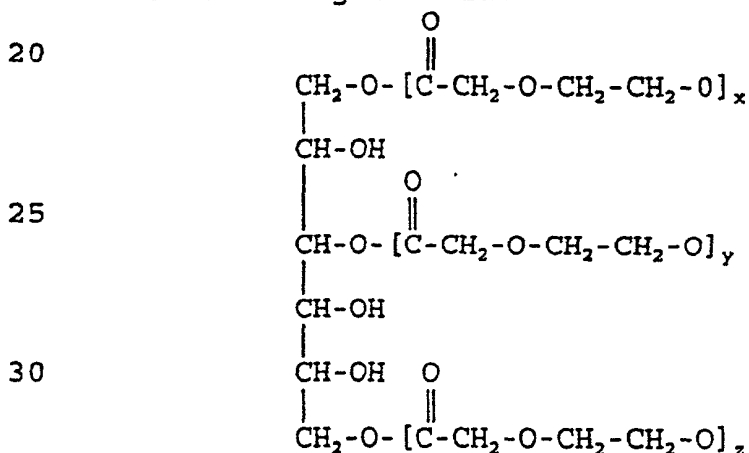

where the value of x, y and z for the polydioxanone chains may be the same or different so long as the product has an 35 inherent viscosity between about 0.01 deciliters per gram and about 0.5 deciliters per gram in hexafluoroisopropanol (HFIP) at 25°C.

Polymers of p-dioxanone are not soluble in common organic solvents. An advantage of the polymer described

herein is that it is soluble in methylene chloride. Thus it is easily used as a coating.

5 The polymerization parameters are controlled to provide a polymer having an inherent viscosity between about 0.01 and 0.5 dl/gram in HFIP at 25°C. It is within the purview of those skilled in the art to determine the appropriate polymerization parameters to provide polymers having the desired inherent viscosity in view of the disclosure herein.

10 The polymers described herein can be used as an absorbable coating for surgical devices formed from using any known technique, such as, for example, extrusion, molding and/or solvent casting. The polymers can be used alone, blended with other absorbable compositions, or in
15 combination with non-absorbable components. A wide variety of surgical articles can be coated with the polymers. These include but are not limited to clips and other fasteners, staples, sutures, pins, screws, prosthetic device, wound dressings, drug delivery devices, anastomosis rings, and
20 other implantable devices. Fibers coated with the present polymers can be knitted or woven with other fibers, either absorbable or nonabsorbable to form meshes or fabrics.

The star polymers described herein may advantageously be endcapped with isocyanate groups.

25 Isocyanate endcapping can be achieved by reacting the polymer with a diisocyanate. Suitable diisocyanates include hexamethylene diisocyanate, diisocyanatolysine ethyl ester and butane diisocyanate with diisocyanatolysine ethyl ester being preferred. Diisocyanates which may lead to
30 harmful by-products upon hydrolysis of the polymer, such as, for example, certain aromatic diisocyanates, should not be employed where the composition is intended for use within a mammalian body. While endcapping with diisocyanate is preferred, it is also contemplated that other agents having

at least two reactive sites can be employed for endcapping and for facilitating cross-linking. Suitable other endcapping agents include, for example diketene acetals such as bis-vinyl-2, 4, 8, 10-tetraoxyspioundecane.

5 The conditions under which the polymer is reacted with the diisocyanate may vary widely depending on the specific polymer being end capped, the specific diisocyanate being employed, and the desired degree of end capping to be achieved. Normally, the polymer is heated to a temperature
10 sufficient to form viscous liquid (e.g., to temperatures of about 75°C for p-dioxanone homopolymers) and added dropwise to a solution of the diisocyanate at room temperature with stirring. The amount of diisocyanate employed can range from about 2 to about 8 moles of diisocyanate per mole of
15 polymer. Suitable reaction times and temperatures range from about 15 minutes to 72 hours or more at temperatures ranging from about 0°C to 250°C.

 Once endcapped with isocyanate, the polymers may advantageously be cross-linked. Cross-linking is normally
20 performed by exposing the endcapped polymer to water in the presence of a catalyst, such as a tertiary amine catalyst.

 The exact reaction conditions for achieving cross-linking will vary depending on a number of factors such as the composition of the polymer, the degree of endcapping,
25 the specific isocyanate used to end cap and the desired degree of cross-linking. Normally, the cross-linking reaction is conducted at temperatures ranging from 20°C to about 40°C for five minutes to about 72 hours or more. The amount of water employed will normally range from about 0.05
30 moles to 1 moles per mole of polymer. While water is a preferred reactant to effect cross-linking it should be understood that other compounds could also be employed either together with or instead of water. Such compounds include diethylene glycol, polyethylene glycol and diamines,

such as, for example, diethylamino propanediol. Suitable catalysts for use in the cross-linking reaction include 1,4 diazobicyclo [2.2.2] octane, triethylamine, and diethylaminoethanol.

5 The amount of catalyst employed can range from about 0.5 grams to about 50 grams per kilogram of polymer being cross-linked.

 When the composition is intended for implantation it is possible to effectuate cross-linking in situ using the
10 water naturally present in a mammalian body or with added water.

 The isocyanate endcapped polymers can also be cross-linked by the application of heat alone, or by exposing the polymer to diamine vapor. These cross-linking
15 techniques are particularly useful when the polymers are to be used as a filament coating.

 In an alternative embodiment, the isocyanate endcapped polymers described herein are admixed with a filler prior to cross-linking. While any known filler may
20 be used, hydroxyapatite, tricalcium phosphate, bioglass or other bioceramics are the preferred fillers. Normally, from about 10 grams to about 400 grams of filler are mixed with 100 grams of polymer. Cross-linking of the polymer/filler mixture can be carried out using any of the above-described
25 methods. The filled, cross-linked polymers are useful; for example, as a molding composition. As another example, the filled endcapped polymer (with or without crosslinking) can be packed into a bone fusion implant (e.g., fusion cage, plug, hip joint prosthesis, etc.) as a bone-growth-inducing
30 substance. The use of such packed implants are disclosed, for example, in U.S. Patent No. 5,026,373 the disclosure of which is incorporated herein by this reference. The filled polymers are stable for several months when kept dry. These

dry mixtures will cross-link upon exposure to water without dispersing in water.

In another embodiment, an isocyanate endcapped star polymer is chemically altered to provide a desired charge on the polymer. The presence of charged groups on the polymer can enhance wound healing in either hard or soft tissue. To impart a positive charge, the endcapped polymer may be reacted with a positive charge inducing reactant. One suitable positive charge inducing reactant is diethylethanolamine which results in the presence of diethylaminoethyl (DEAE) groups on the polymer. To impart a negative charge, the endcapped polymer may be reacted with a negative charge inducing reactant. One such reactant is carboxymethanol which results in the presence of carboxymethyl (CM) groups on the polymer.


The conditions at which the charge inducing reactant is reacted with the isocyanate endcapped polymer will vary depending on the specific polymer, the degree of endcapping, the nature of the isocyanate used for endcapping and the number of charges to be provided on the polymer. Normally, from about 0.1 to about 0.5 moles of charge inducing reactant are employed per mole of isocyanate groups. The polymer is normally dissolved in a solvent and added dropwise to a solution of the charge inducing reactant. Stirring and heating to temperatures up to about 40°C can facilitate the reaction.

It is also contemplated that the isocyanate endcapped polymer can be mixed with a material known to carry a charge to provide a charged composition which enhances wound healing. Such materials include polysaccharides modified to include charge inducing substituents such as, for example, carboxymethyl or diethylaminoethyl groups. The weight ratio of modified polysaccharide to polymer should be in the range of about 1

to about 20%, preferably about 5 to about 10%. DEAE-Sephadex is a particularly useful material to be mixed with the bioabsorbable polymers described herein.

5 In another embodiment, isocyanate endcapped star polymer and filler are first mixed together as disclosed hereinabove and thereafter charge inducing reactant is added to the mixture in the same manner as disclosed hereinabove. It has been found that these mixtures of isocyanate endcapped star polymer, filler and charge inducing reactant
10 are stable for several months and more when stored under dry conditions.

It should be understood that for polymers of the embodiments having an induced charge and/or endcapped with a lysine isocyanate, any bioabsorbable polymer may be
15 employed. Preferred bioabsorbable polymers according to this embodiment are those having the general formula:



wherein: n equals 1 to 13;

$R_1, R_2 \dots R_{n+1}$ are the same or different and selected from the
20 group of a hydrogen atom or Z wherein Z comprises repeating units selected from the group consisting of glycolide, lactide, p-dioxanone, ϵ -caprolactone and alkylene carbonate units;

at least three of said $R_1, R_2 \dots R_{n+1}$ groups being
25 other than hydrogen;

at least one of said Z groups being endcapped with an isocyanate; and

at least a portion of said endcapped Z groups having diethylamino ethyl group thereon.

30 Other suitable bioabsorbable polymers which may be endcapped with isocyanate include polyalkylene oxides containing a major amount, i.e., greater than 50 weight percent, of alkylene oxide units such as ethylene oxide units, propylene oxide units and combinations thereof and a

minor amount, i.e., less than 50 weight percent, preferably less than about 20 weight percent, more preferably less than about 5 weight percent, units derived from a bioabsorbable monomer such as glycolide, lactide, glycolic acid, lactic acid, p-dioxanone, trimethylene carbonate, trimethylene dimethylene carbonate, dioxepanone, alkylene oxalates, epsilon-caprolactone, combinations of the foregoing, and the like. The polyalkylene oxides can be linear or branched random, block or graft copolymers. The polyalkylene oxides employed herein will generally be of low molecular weight, e.g., the polymer will possess a molecular weight of less than about 6,000.

It has also been discovered that novel polymers in accordance with this disclosure can serve as a substrate for cell growth. Specifically, star polymers endcapped with lysine diisocyanate and cross-linked, with or without an induced charge, can be used as a cell growth substrate. When being used for cell growth, the polymers described herein can also be mixed with collagen, gelatin or other growth proliferating/enhancing materials.

In yet another embodiment, the isocyanate capped star polymer is reacted with an alkylene oxide polymer. In this manner, hydrophilic pendent chains are formed from at least a portion of the isocyanate groups on the polymer. Preferably, at least a portion of the isocyanate groups remain available for cross-linking. Suitable polyalkylene oxides include polyethylene oxide, polypropylene oxide and block copolymers of polyethylene oxide and polypropylene oxide. The alkylene oxide side chains reduce cell adherence while maintaining the biodegradability of the polymer.

It is further contemplated that one or more medico-surgically useful substances, e.g., those which accelerate or beneficially modify the healing process when particles are applied to a surgical repair site, can be

incorporated into surgical devices made from the materials described herein. So, for example, the surgical device can carry a therapeutic agent which will be deposited at the repair site. The therapeutic agent can be chosen for its antimicrobial properties, capability for promoting repair or reconstruction and/or new tissue growth. Antimicrobial agents such as broad spectrum antibiotic (gentamicin sulfate, erythromycin or VX glycopeptides) which are slowly released into the tissue can be applied in this manner to aid in combating clinical and sub-clinical infections in a tissue repair site. To promote repair and/or tissue growth, one or several growth promoting factors can be introduced into the sutures, e.g., fibroblast growth factor bone morphogenetic protein, epidermal growth factor, platelet derived growth factor, macrophage derived growth factor, alveolar derived growth factor, monocyte derived growth factor, magainin, and so forth. Some therapeutic indications are: glycerol and tissue or kidney plasminogen activator to cause thrombosis, superoxide dimutase to scavenge tissue damaging free radicals, tumor necrosis factor for cancer therapy or colony stimulating factor and interferon, interleukin-2 or other lymphokine to enhance the immune system. It is also contemplated that the medico-surgically useful substance may enhance blood coagulation. Thrombin is one such substance.

It is further contemplated that the isocyanate capped polyalkylene oxide polymer described above can be combined with therapeutic agents, preferably charged oxidized beads, e.g., cross-linked dextran, which are commonly employed to promote wound healing. The above mixture of hydrophilic isocyanate capped polyalkylene oxide and therapeutic agent can be reacted with any of the above-identified isocyanate capped star polymers prior to introduction to the wound site to form a polymer network

that entraps the therapeutic agent. Upon placement of the polyalkylene oxide/isocyanate capped star polymer network in the wound, the liquid present at the wound site causes the polymer network to swell; thereby allowing delivery of the therapeutic agent through either diffusion or degradation of the polymer network.

The following non-limiting Examples illustrate the preparation of polymers in accordance with the present disclosure.

EXAMPLES 1-3

100.0 grams of purified p-dioxanone (99.5% purity) is placed in a polymerization tube. Then 0.02% (w/w) $\text{Sn}(\text{Oct})_2$, i.e., weight of $\text{Sn}(\text{Oct})_2$ to weight of polydioxanone, in diethyl ether is added to the tube and dried for two hours under vacuum at 25°C. In addition, the following amounts of the indicated initiator is added to the vessel:

<u>Example No.</u>	<u>Initiator</u>	<u>Amount</u>
1	Mannitol	1.0 gram
2	Mannitol	2.0 grams
3	Threitol	2.0 grams

Polymerization is conducted at 100°C for 24 hours. The resulting polymer is heated to 75°C at reduced pressure (0.5mmHg) to remove any residual monomer or other volatile impurities. The polymers produced have the following inherent viscosities in HFIP at 25°C:

<u>Example No.</u>	<u>Inherent Viscosity</u>
1	0.83
2	0.77
3	0.39

EXAMPLES 4-7

75 grams of p-dioxanone (99.5% purity) is placed in a polymerization tube. Then, 0.015% (w/w) $\text{Sn}(\text{Oct})_2$, i.e., weight of $\text{Sn}(\text{Oct})_2$ to weight of polydioxanone, in

diethyl ether is added to the tube and dried for two hours under vacuum at 25°C. In addition, the following amounts of the indicated initiator is added to the vessel:

<u>Example No.</u>	<u>Initiator</u>	<u>Amount</u>	
5	4	Mannitol	1.0 gram
	5	Mannitol	0.5 grams
	6	Threitol	1.5 grams
	7	Threitol	0.75 grams

- 10 Polymerization is conducted for 24 hours at 100°C. The resulting polymers are particularly useful for coatings on braided absorbable sutures.

EXAMPLE 8

- 15 A star copolymer of p-dioxanone and glycolide is prepared as follows: 458.3 grams of previously dried p-dioxanone, 41.7 grams of previously dried glycolide, 147.5 grams of mannitol, and 0.106 grams of stannous octoate catalyst are reacted in a N₂ atmosphere under anhydrous conditions in a one liter 3 neck flask equipped with a mechanical stirrer.

- 20 The flask is heated overnight at 98°C with stirring at 60 rpm. The mixing rate is increased to 100 rpm after about 12 hours of reaction. After 20 hours, the temperature is reduced to 90°C. The stirring rate is further increased to 200 rpm after a total of 22 hours of reaction time. After a total reaction time of about 39 hours, the material is extruded at 94°± 4°C. The flask is placed under vacuum for 6 hours and the polymer is post-treated by heating at 75°C for about 63 hours. A total weight of 599.5 grams of polymer is recovered.

- 30 The product of Example 8 is useful as a bone substitute. The low viscosity absorbable polymer can be worked by hand and applied directly to a bone defect to achieve hemostasis.
- 35

The following non-limiting Examples illustrate the endcapping of polymers in accordance with this invention:

EXAMPLE 9


5 Preparation of Star Copolymer

 A star copolymer of p-dioxanone and glycolide is prepared as follows: 458.3 grams of previously dried p-dioxanone, 41.7 grams of previously dried glycolide, 83.5 grams of pentaerythritol, and 0.106 grams of stannous
10 octoate catalyst are reacted in a N₂ atmosphere under anhydrous conditions in a one liter 3 neck flask equipped with a mechanical stirrer. Polymerization is conducted at 90°C with stirring for a total reaction time of about 69 hours. The copolymer is then extruded and heated at 75°C
15 for 48 hours to remove vaporizable impurities.

Preparation of Lysine Diisocyanate Compound

- 5 A five 1 round bottom flask equipped with a mechanical stirrer, condenser and thermometer is dried by heating to $> 100^{\circ}\text{C}$ under nitrogen purge. After cooling the reactor is charged with 500.0 g lysine ethyl ester dihydrochloride (I) and 4000 ml 1,1,1,3,3,3-hexamethyl disilazane (II). The slurry is heated to 117°C for 24 hours, cold and filtered through Celite to remove the silazane hydrochloride salt. After filtration excess
- 10 disilazane (II) is removed under vacuum at room temperature leaving a clear light pink liquid (III). This product is purified by distillation at < 50 mT. 325 ml of a light yellow liquid is obtained between 120 and 130°C . (Yield: 295 g, 48%.)
- 15 A five-liter round bottom flask equipped with a mechanical stirrer, 1 liter addition funnel and thermometer is dried by heating to $> 100^{\circ}\text{C}$ under nitrogen purge. After cooling the reactor is charged with 2500 ml anhydrous ether, 245 ml triethyl amine and 317 ml of the previously obtained
- 20 reaction product (III). In a separate dry flask 189 g of triphosgene is combined with 1250 ml of ether and stirred under nitrogen until a clear solution is obtained. This solution is transferred to the addition funnel and added dropwise to the solution in the flask at -20°C . After the
- 25 addition is complete the reaction is allowed to warm to room temperature and stirred for 40 hrs. At the end of this time the solution is filtered to remove the TEA hydrochloride salt and placed on the rotovap to reduce the volume. A simple distillation at < 200 mT results in a purified
- 30 product received between 107 and 110°C . The clear, colorless liquid weights 125 g, (60% yield). The total yield is 29%.

The reaction sequence can be schematically represented as follows:

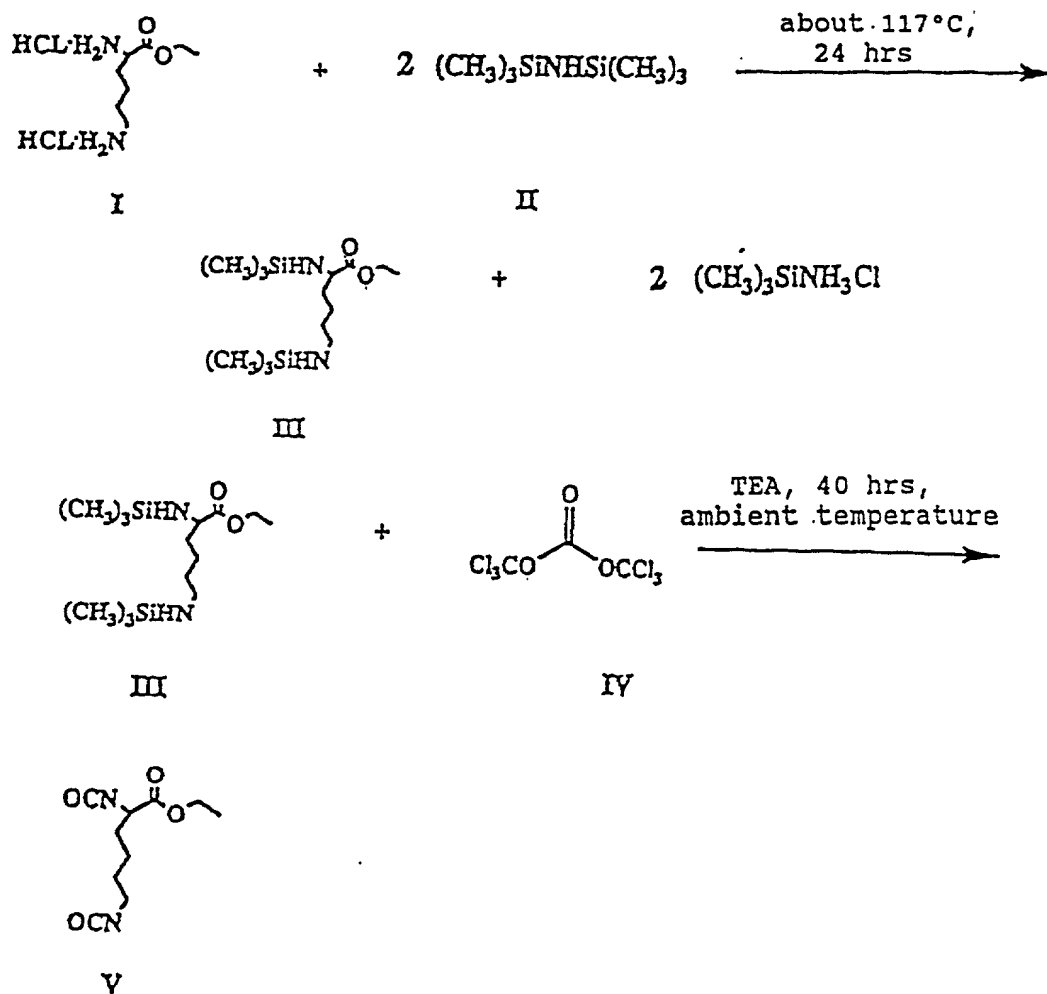

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100																																																																																																																																																											
0	00000000	00000001	00000010	00000011	00000100	00000101	00000110	00000111	00001000	00001001	00001010	00001011	00001100	00001101	00001110	00001111	00010000	00010001	00010010	00010011	00010100	00010101	00010110	00010111	00011000	00011001	00011010	00011011	00011100	00011101	00011110	00011111	00100000	00100001	00100010	00100011	00100100	00100101	00100110	00100111	00101000	00101001	00101010	00101011	00101100	00101101	00101110	00101111	00110000	00110001	00110010	00110011	00110100	00110101	00110110	00110111	00111000	00111001	00111010	00111011	00111100	00111101	00111110	00111111	01000000	01000001	01000010	01000011	01000100	01000101	01000110	01000111	01001000	01001001	01001010	01001011	01001100	01001101	01001110	01001111	01010000	01010001	01010010	01010011	01010100	01010101	01010110	01010111	01011000	01011001	01011010	01011011	01011100	01011101	01011110	01011111	01100000	01100001	01100010	01100011	01100100	01100101	01100110	01100111	01101000	01101001	01101010	01101011	01101100	01101101	01101110	01101111	01110000	01110001	01110010	01110011	01110100	01110101	01110110	01110111	01111000	01111001	01111010	01111011	01111100	01111101	01111110	01111111	10000000	10000001	10000010	10000011	10000100	10000101	10000110	10000111	10001000	10001001	10001010	10001011	10001100	10001101	10001110	10001111	10010000	10010001	10010010	10010011	10010100	10010101	10010110	10010111	10011000	10011001	10011010	10011011	10011100	10011101	10011110	10011111	10100000	10100001	10100010	10100011	10100100	10100101	10100110	10100111	10101000	10101001	10101010	10101011	10101100	10101101	10101110	10101111	10110000	10110001	10110010	10110011	10110100	10110101	10110110	10110111	10111000	10111001	10111010	10111011	10111100	10111101	10111110	10111111	11000000	11000001	11000010	11000011	11000100	11000101	11000110	11000111	11001000	11001001	11001010	11001011	11001100	11001101	11001110	11001111	11010000	11010001	11010010	11010011	11010100	11010101	11010110	11010111	11011000	11011001	11011010	11011011	11011100	11011101	11011110	11011111	11100000	11100001	11100010	11100011	11100100	11100101	11100110	11100111	11101000	11101001	11101010	11101011	11101100	11101101	11101110	11101111	11110000	11110001	11110010	11110011	11110100	11110101	11110110	11110111	11111000	11111001	11111010	11111011	11111100	11111101	11111110	11111111

5

10

15

20

30

30

45 grams of the DMTMC polymer is dissolved in 50 ml methylene chloride and is added dropwise to 100 grams hexamethylene diisocyanate. The mixture is stirred at room temperature for 48 hours. The resulting endcapped DMTMC polymer is washed twice with hexane and dried.

The following Example illustrates the use of the cross-linked polymers as a coating for sutures.

EXAMPLE 12

Five grams of the endcapped polymer of Example 1 are dissolved in 100 ml of methylene chloride. The polymer solution is applied to an absorbable monofilament suture. The coated suture is heated to simultaneously drive off solvent and effectuate cross-linking of the polymer coating. The monofilament coated in this manner exhibits greater in vivo strength retention compared to uncoated monofilaments of the same size and composition.

The following Examples show filled cross-linked polymers useful as a bone-putty.

EXAMPLE 13

Ten grams of the isocyanate endcapped polymer of Example 9 is mixed with 5 grams of hydroxyapatite. Once a substantially homogenous mixture is attained, the polymer is cross-linked by the addition of 0.5 ml of water, 1 ml of DEAE and 0.5 ml stannous octoate. As the reaction proceeds, CO₂ is released, forming a moldable foam which has a putty-like consistency and can be molded by hand into a desired shape or easily packed into a bone defect.

EXAMPLES 14-18

10 grams of isocyanate endcapped star copolymer of Example 9 is mixed with 5.0 grams of hydroxyapatite until a substantially homogeneous mixture is obtained in the form of

a white paste. Various formulations of bone putty are produced by adding water, stannous octoate, and diethylethanolamine to 1.0 gram of the hydroxyapatite/endcapped star copolymer paste. These formulations are presented in the following table:

Example No.	Hydroxyapatite Copolymer of Ex. 9	H ₂ O	Sn(Oct) ₂	DEAE	Increase in Volume
14	1.0 gram	1 drop	2 drops	2 drops	2X
15	1.0 gram	1 drop	2 drops	3 drops	3X
16	1.0 gram	1 drop	3 drops	3 drops	3X
17	1.0 gram	1 drop	3 drops	2 drops	4X
18	1.0 gram	1 drop	4 drops	7 drops	2X

Each formulation hardens to provide structural support to aid in hard tissue healing. The bone putty of Examples 16-18 becomes hard to the touch in 10 minutes or less.

EXAMPLE 19

A modified bone putty is prepared as follows: 6.1 grams of calcium phosphate tribasic are mixed with 3.2 grams of hydroxyapatite. 15 grams of endcapped star copolymer of Example 10 are added to the calcium phosphate tribasic/hydroxyapatite mixture.

1.0 gram of the endcapped star copolymer/calcium phosphate tribasic/hydroxyapatite composition is placed into a scintillation vial. Two drops of a 2:1 diethylethanolamine/H₂O mixture and 2 drops of Sn(Oct)₂ catalyst solution are added to the vial. The resulting composition is placed into a tibia bone defect, where it foams with the release of CO₂, absorbs blood and hardens to provide structural support to the bone.

The following Examples show the use of the present polymer as a substrate for cell growth.

EXAMPLES 19-23

5 The endcapped polymer of Example 9 is mixed with various amounts of DEAE solution as set forth in the following Table:

Example No.	Polymer (gms)	DEAE (drops)	Concentration DEAE (grams/drop)
19	.35	0	N/A
20	.33	5	.07
21	.31	3	.10
22	.42	2	.21
23	.27	1	.027

15 The polymers are coated onto one half of a 5 cm tissue culture plate and allowed to cure for two days. Mouse fibroblasts (L929) are trypsinized and seeded onto the plates. The cells are grown in minimal essential media with 10% fetal calf serum. The medium was changed after 1,4 and 20 7 days. Cell growth was observed on both the uncoated and coated half of the tissue culture plate, indicating that the present polymers are a suitable substrate for cell growth.

 The following Example shows the preparation of a polymer of another embodiment.

25

EXAMPLE 24

 10 grams of the lysine isocyanate capped polymer of Example 9 are placed into a reaction vessel with 9 grams of poly(ethylene oxide monomethylether) (Mol. Wt. 350) and 30 .0038 grams stannous octoate. The reactants are stirred at ambient temperature for 4 hours. The resulting polymer is recovered as a viscous liquid which can be applied directly to a wound site.

EXAMPLE 25

20.6g of diisocyanatolysine ethyl ester was placed in a clean, dry 100mL round bottomed flask equipped with stirrer and N₂ flow. The material was allowed to dry. A
5 95:5 weight percent polyethyleneoxide-glycolide copolymer (1000 molecular weight) was placed under vacuum for about 1 hour. The polymer was then added dropwise to the diisocyanatolysine ether ester via syringe to provide an isocyanate-endcapped material.

EXAMPLE 26

The lysine-diisocyanate endcapped star dioxanone/glycolide copolymer obtained in EXAMPLE 9 is applied to tissue as an adhesive. The material is placed between tissue to be joined and is of sufficiently low
15 viscosity to enter small crevices and interstices present in the tissue. Water present in the tissue causes the endcapped polymer to cross-link in situ and cure to a solid. In this matter, the cured encapped polymer provides a mechanical interlocking function which effectively maintains
20 the tissue in the desired, joined configuration.

EXAMPLE 27

A bone substitute material is prepared by mixing 0.55 grams of the encapped star copolymer obtained in EXAMPLE 9 with 1.65 grams of fine grained b-TCP. Both the
25 copolymer and TCP were previously dried at 145°C for 2 hours under vacuum prior to mixing. Then, 38.5 ml of DEAE is added to the mixture. The resulting material is packaged in a substantially dry state within a foil or other water-impermeable package. In this state, the product is stable
30 for several months. When needed, the package is opened and the product is packed into bone. Upon contact with water naturally present or added, CO₂ gas is generated so that when the material hardens a rigid, porous material is then provided, giving structural support to aid in hard tissue

healing. Over time, the biodegradable polymer is replaced with new bone tissue growing into the porous bone substitute.

EXAMPLE 28

5 The material of EXAMPLE 27 is further mixed with excess lysine-diisocyanate (110 ml) which increases the amount of CO₂ generated upon implantation thus increasing the number of pores in the resulting bone substitute. In this manner, the porosity of the bone substitute can be
10 adjusted as desired.

 It will be understood that various modifications may be made to the embodiments disclosed herein. For example, the compositions in accordance with this disclosure can be blended with other biocompatible, bioabsorbable or
15 non-bioabsorbable materials. Therefore, the above description should not be construed as limiting, but merely as exemplifications of preferred embodiments. Those skilled in art will envision other modifications within the scope and spirit of the claims appended hereto.

20